


Kassettengerät Euroraster

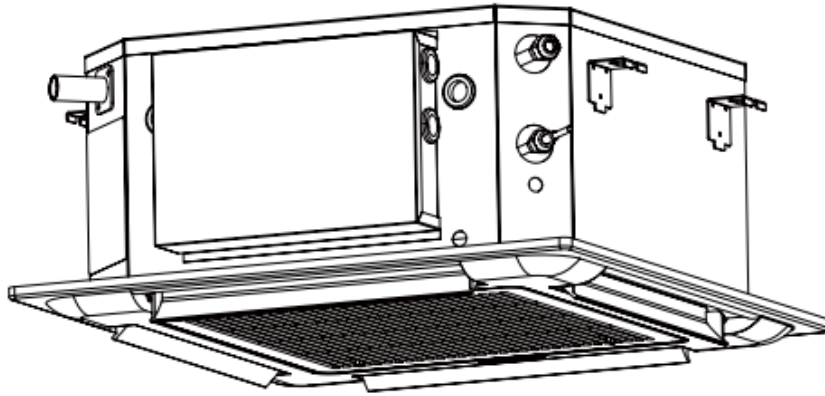

in*s*sens

Indoor Unit Model		--	CASK-12C	CASK-18C
Indoor Unit	Rated Voltage	V ~	220-240	220-240
	Rated Frequency	Hz	50	50
	Phases	--	1	1
	Power Supply Mode	--	outdoor	outdoor
	Cooling Capacity	W	3500	5200
	Heating Capacity	W	3500	5200
	Cooling Power Input	W	60	73
	Heating Power Input	W	60	73
	Cooling Current	A	0.26	0.32
	Heating Current	A	0.26	0.32
	Air Flow Volume	m ³ /h	700	760
	Air Flow Volume	CFM	412	447
	Application Area	m ²	19-29	23-34
	Fan Type	--	Centrifugal	Centrifugal
	Fan Diameter Length(D×L)	mm	φ283/166	φ283/166
	Cooling Speed	r/min	910/820/740	910/820/740
	Heating Speed	r/min	910/820/740	910/820/740
	Fan Motor Power Output	W	30	30
	Fan Motor Capacitor	μF	2	2
	Evaporator Form	--	Aluminum Fin-copper Tube	Aluminum Fin-copper Tube
	Evaporator Pipe Diameter	mm	φ7	φ7
	Evaporator Row-fin Ga	mm	1.6	1.6
	Evaporator Coil Length (L×D×W)	mm	1260×26×205	1260×26×205
	Swing Motor Model	--	/	/
	Swing Motor Power Output	W	/	/
	Set Temperature Range	°C	16-31	16-31
	Sound Pressure Level	dB (A)	47/44/39	47/44/39
	Sound Power Level	dB (A)	/	/
	Dimension (W×D×H)	mm	570×570×260	570×570×260
	Dimension of Carton Box (W×D×H)	mm	725×725×300	725×725×300
Dimension of Package(W×D×H)	mm	730×730×300	730×730×300	
Stacked Layers	--	/	/	
Net Weight	kg	19	19	
Gross Weight	kg	22	22	
panel	Dimension (W×D×H)	mm	650×650×28	650×650×28
	Dimension of Carton Box (W×D×H)	mm	745×745×100	745×745×100
	Dimension of Package(W×D×H)	mm	750×750×100	750×750×100
	Stacked Layers	--	/	/
	Net Weight	kg	2.2	2.2
	Gross Weight	kg	4	4