




KANALGERÄTE



Optional

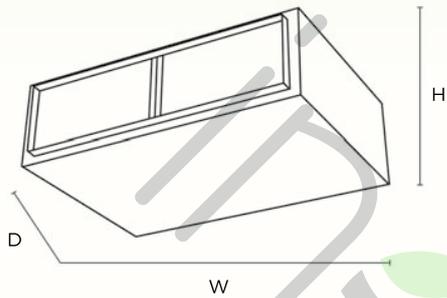

Optional

Fintek Code	Fintek Evaporator Code	MICK07DK	MICK09DK	MICK12DK	MICK18DK	MJCK18DK-V	MICK24DK	MJCK24DK-V
Midea Product Code	Midea Evaporator Code	MTIU07-HWFNX(-GA)	MTIU-09HWFNX(-GA)	MTIU-12HWFNX(GA)	MTIU-18HWFNX(GA)	MTJ-18HWFNX(GA)	MTIU-24HWFNX(-GA)	MTJ-24HWFNX(GA)
Electric Power	F-V-Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz	Monofase 220-240V 50Hz
Cooling	Capacity	kW (Nom)	2,05	2,63	3,52	5,28	5,28	7,03
Heating	Capacity	kW (Nom)	2,34	2,93	3,81	5,57	5,57	7,51
INDOOR UNIT	Dimensions (L-W-H)	mm	700-506-200	700-506-200	700-506-200	880-674-210	880-674-210	1100-774-249
Net Weight		Kg	17,8	17,8	17,8	24,4	24,4	32,3
Packaging Dimensions (L-D-H)		mm	860-540-285	860-540-285	860-540-285	1070-725-280	1070-725-280	1305-805-315
Gross Weight		Kg	21,5	21,5	21,5	29,6	29,6	39,1
Air Flow (Min-Med-Max)		m ³ /h	230-340-500	230-340-500	300-480-600	515-706-911	515-706-911	825-1035-1229
Nominal Fan Pressure		Pa	25	25	25	25	25	25
Fan Pressure Adjustment Range		Pa	0-40	0-40	0-60	0-100	0-100	0-125
Sound Pressure (Silent-Min-Med-Max)			23-29-31-35	23-29-31-35	23-29-31-35	26-34-38-41	26-34-38-41	27-37-40-42
Connection Pipe Size	Liquid Side Piping	dB(A)	6,35	6,35	6,35	6,35	6,35	9,52
	Gas Side Pipe	dB(A)	9,52	9,52	9,52	12,7	12,7	15,88
Operating Limits	Internal temperatures	Raff. (Min-Max) °C	+16 - +32	+16 - +32	+16 - +32	+16 - +32	+16 - +32	+16 - +32
		B.U. Risc. (Min-Max) °C	0 - +30	0 - +30	0 - +30	0 - +30	0 - +30	0 - +30
		B.S.						



SLEEP COMFORT MODE



MIN. TEMP. HOT



MIN. TEMP. COLD



TIMER



SMART DEFROST



ONLY MULTISPLIT



SELF DIAGNOSIS



DEHUMIDIFICATION



AUTO RESTART MEMORY



INTEGRATED CONDENSATE DRAIN PUMP



EASILY REMOVABLE FILTERS FOR CLEANING



WIRED CONTROLLER (OPTIONAL)